


### SINGLE PARKING SPACE

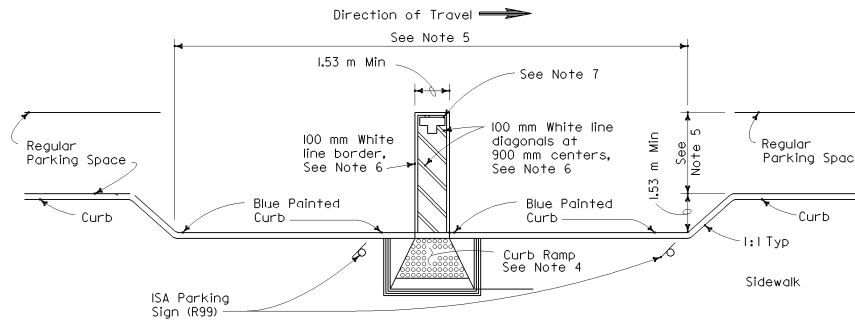

### DOUBLE PARKING SPACE

### ON-STREET PARKING

(Parallel parking)



### PAVEMENT MARKING DETAIL

See Note 7



ISA PARKING SIGN (R99)  
Standard 300 mm x 450 mm  
See Note 3

### NOTES

- Parking spaces shall be so located that persons with disabilities are not compelled to wheel or walk behind parked cars other than their own.
- Surface slopes of accessible on-street parking spaces shall be the minimum feasible.
- Where R99 "ISA Parking Signs" are installed on sidewalks or other paths of travel, the bottom of the sign panel shall be a minimum of 2.04 m above the surface of the sidewalk or path.
- Curb ramps shall conform to the details shown on Revised Standard Plan RSP A88A.
- Accessible on-street parking spaces shall not be smaller in length or width than that specified by the local jurisdiction for other parking spaces.
- Blue paint, instead of white may be used for marking accessibility aisles in areas where snow may cause white markings to not be visible.
- The words "NO PARKING", shall be painted in white letters no less than 300 mm high on a contrasting background and located so that it is visible to traffic enforcement officials.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

## ACCESSIBLE PARKING ON-STREET

NO SCALE

ALL DIMENSIONS ARE IN  
MILLIMETERS UNLESS OTHERWISE SHOWN

NSP A90A AND NSP A90B DATED 03-12-04 SUPERSEDES STANDARD PLAN A90  
DATED JULY 1, 1999-PAGE 81 OF THE STANDARD PLANS BOOK DATED JULY 1999.

## NEW STANDARD PLAN NSP A90B

ISA = International Symbol of Accessibility